

* STANDARD FEATURES *

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accommodates flow rates from 19 to 35 US GPM
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested


* AVAILABLE OPTIONS *

- 150# Flanged Inlet & Outlet
- Bracket Mounting
- Foot Mounting
- Inlet/Outlet Pressure Gauges
- Removable Dome for easy clean out
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 210°F
- 304 or 316 Stainless Steel construction

* PRESSURE DROP *

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$P = \left(\frac{\text{GPM}}{11} \right)^2$$

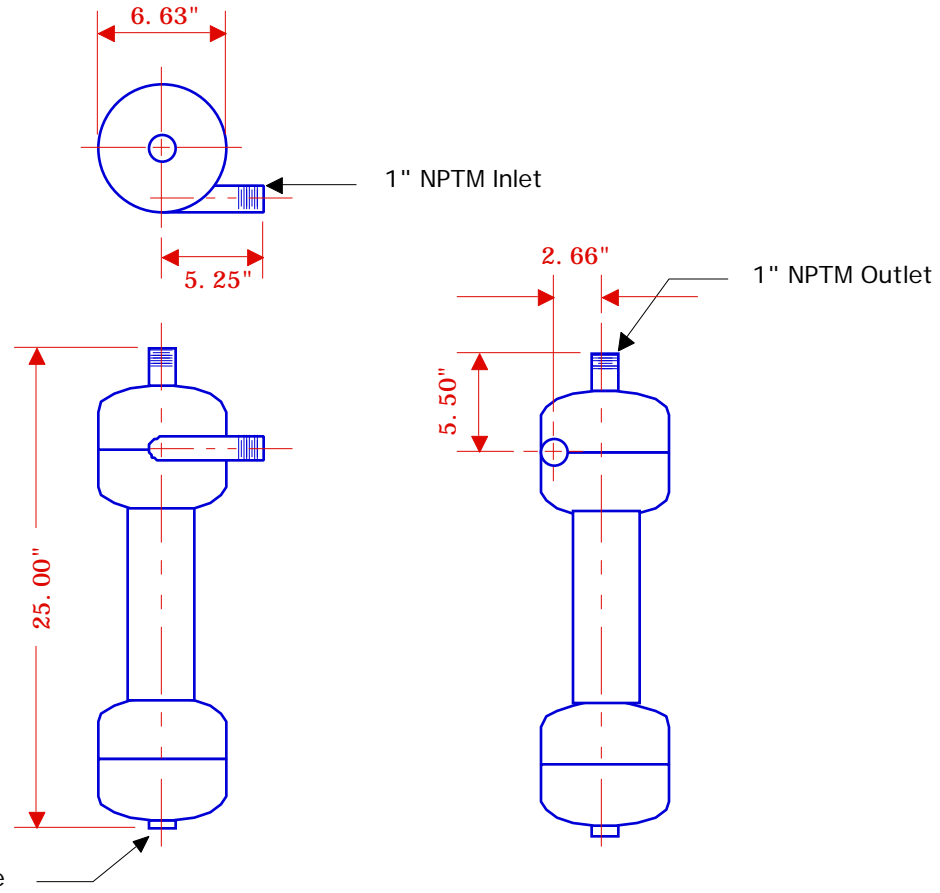

Net Weight: 30 lbs
 Weight (full): 45 lbs
 Volume: 1.7 gals

Note - All dimensions are approximate and are subject to change without notice.



SBS CORPORATION

81 MILL STREET • ROCHESTER, MI 48307 • USA

U.S. & Canada 1-800-662-8776 • Fax 1-248-652-4303 • www.sbscorporation.com

CUSTOMER:

DRAWN BY: GSB

DATE: 6-6-97

SCALE: 1 : 10

CS-100 Centrifugal Separator