

* STANDARD FEATURES *

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accommodates flow rates from 36 to 67 US GPM
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested

* AVAILABLE OPTIONS *


- 150# Flanged Inlet & Outlet
- Bracket Mounting
- Foot Mounting
- Inlet/Outlet Pressure Gauges
- Removable Dome for easy clean out
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 210°F
- 304 or 316 Stainless Steel construction

* PRESSURE DROP *

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$P = \left(\frac{\text{GPM}}{21} \right)^2$$

Note - All dimensions are approximate and are subject to change without notice.

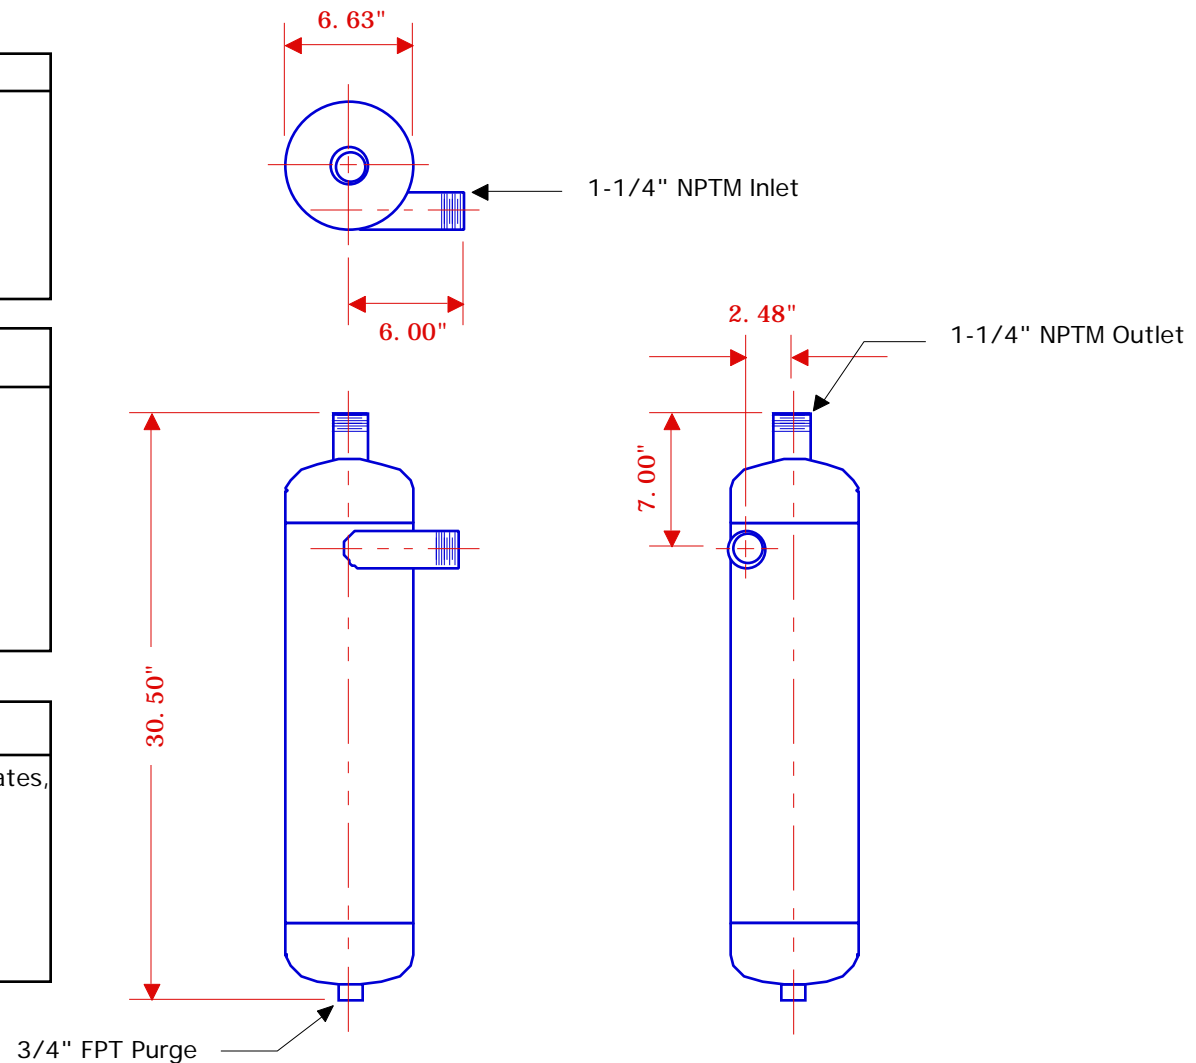

Weight: 48 lbs (empty)
77 lbs (full)
Volume: 3.4 gallons

SBS		SBS CORPORATION	
81 MILL STREET • ROCHESTER, MI 48307 • USA			
U.S. & Canada 1-800-662-8776 • Fax 1-248-652-4303 • www.sbcorporatc			
CUSTOMER:			
DRAWN BY: GSB	DATE: 2/21/02	SCALE:	1 : 10
CS-125 Centrifugal Separator			