

\* STANDARD FEATURES \*

- Removes separable solids larger than 50 micron (325 mesh) and 20% heavier than liquid
- Accommodates flow rates from 5 to 9 US GPM
- 150 PSI working pressure
- Carbon steel construction
- Fully pressure tested


\* AVAILABLE OPTIONS \*

- 150# Flanged Inlet & Outlet
- Bracket Mounting
- Foot Mounting
- Inlet/Outlet Pressure Gauges
- Removable Dome for easy clean out
- Automatic purge valve with timer
- ASME certified for 150 PSIG @ 210°F
- 304 or 316 Stainless Steel construction

\* PRESSURE DROP \*

To determine pressure drop (PSI) at known flow rates, use the following formula:

$$P = \left( \frac{\text{GPM}}{2.7} \right)^2$$

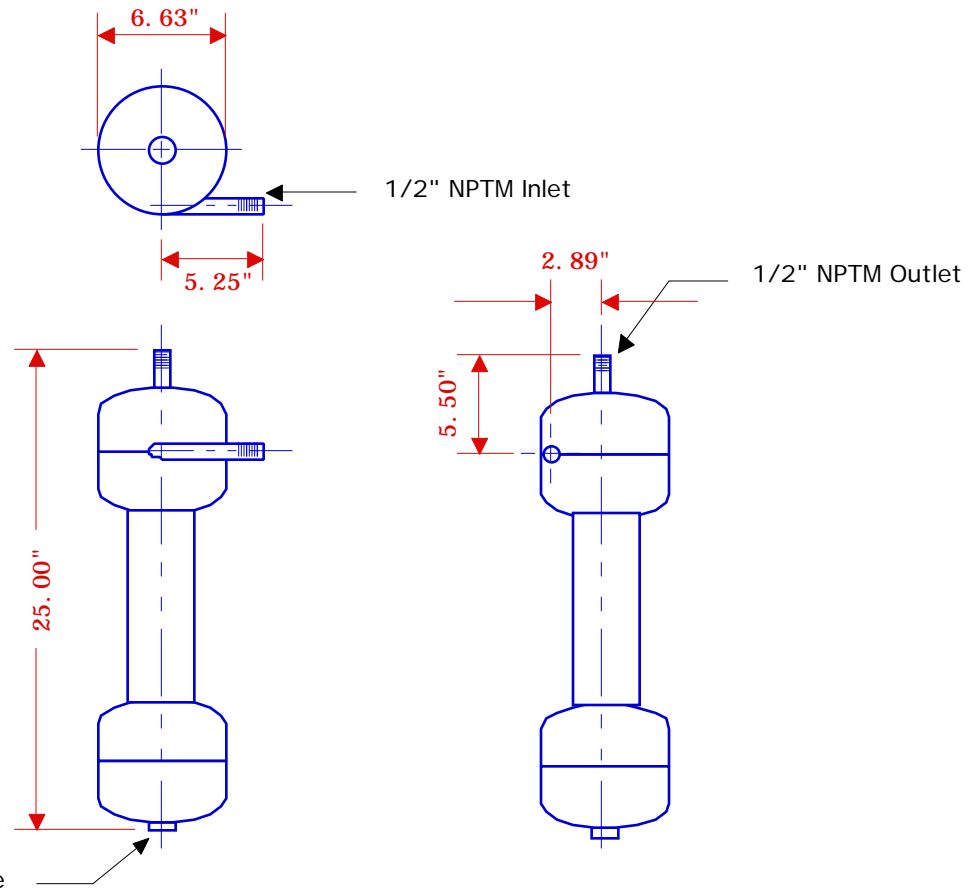

Weight: 40 lbs

Note - All dimensions are approximate and are subject to change without notice.



**SBS CORPORATION**  
 81 MILL STREET, ROCHESTER, MI 48307  
 (800) 662-8776 FAX: (248) 652-4303

DRAWN BY: GSB	DATE: 7-28-98	SCALE: 1 : 10
---------------	---------------	---------------

CS-50 Centrifugal Separator