

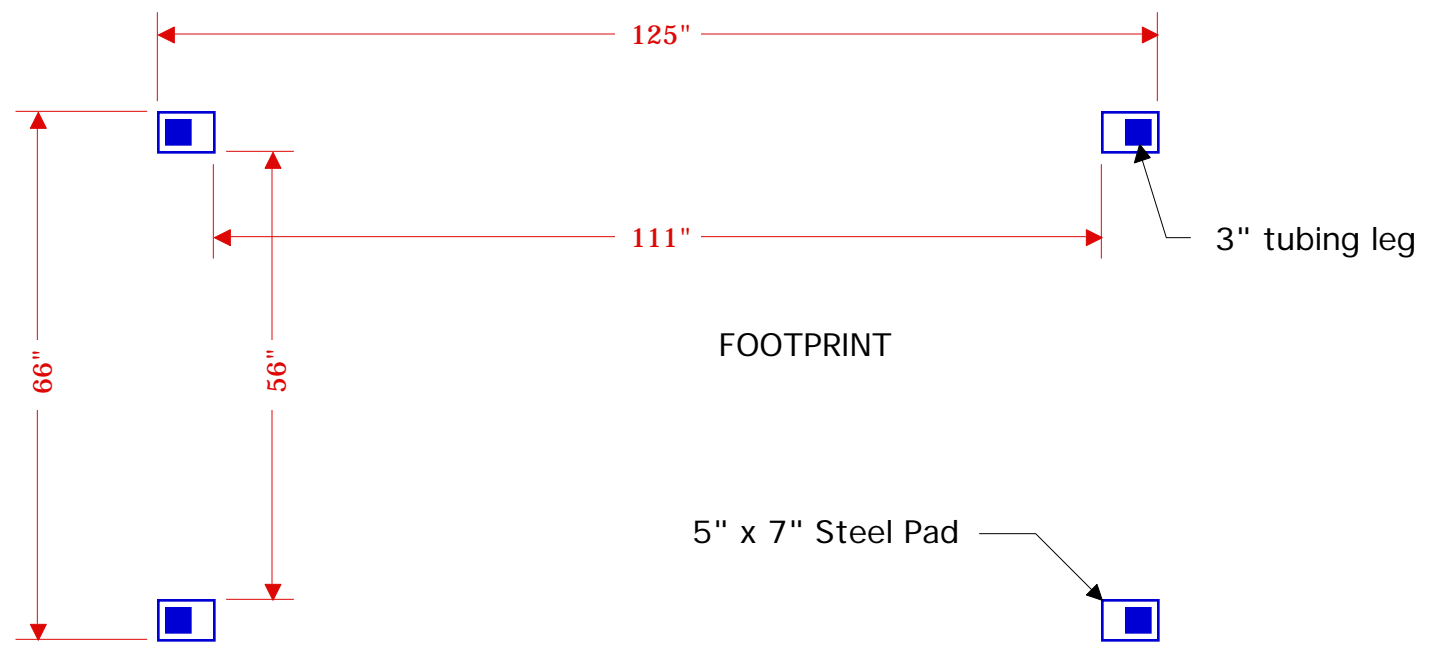


FULL LOAD AMPS	
FAN MOTOR	460 / 3 / 60
5 HP, 1140 RPM	8.8
5 HP, 850 RPM	9.5
3 HP, 860 RPM	6.1

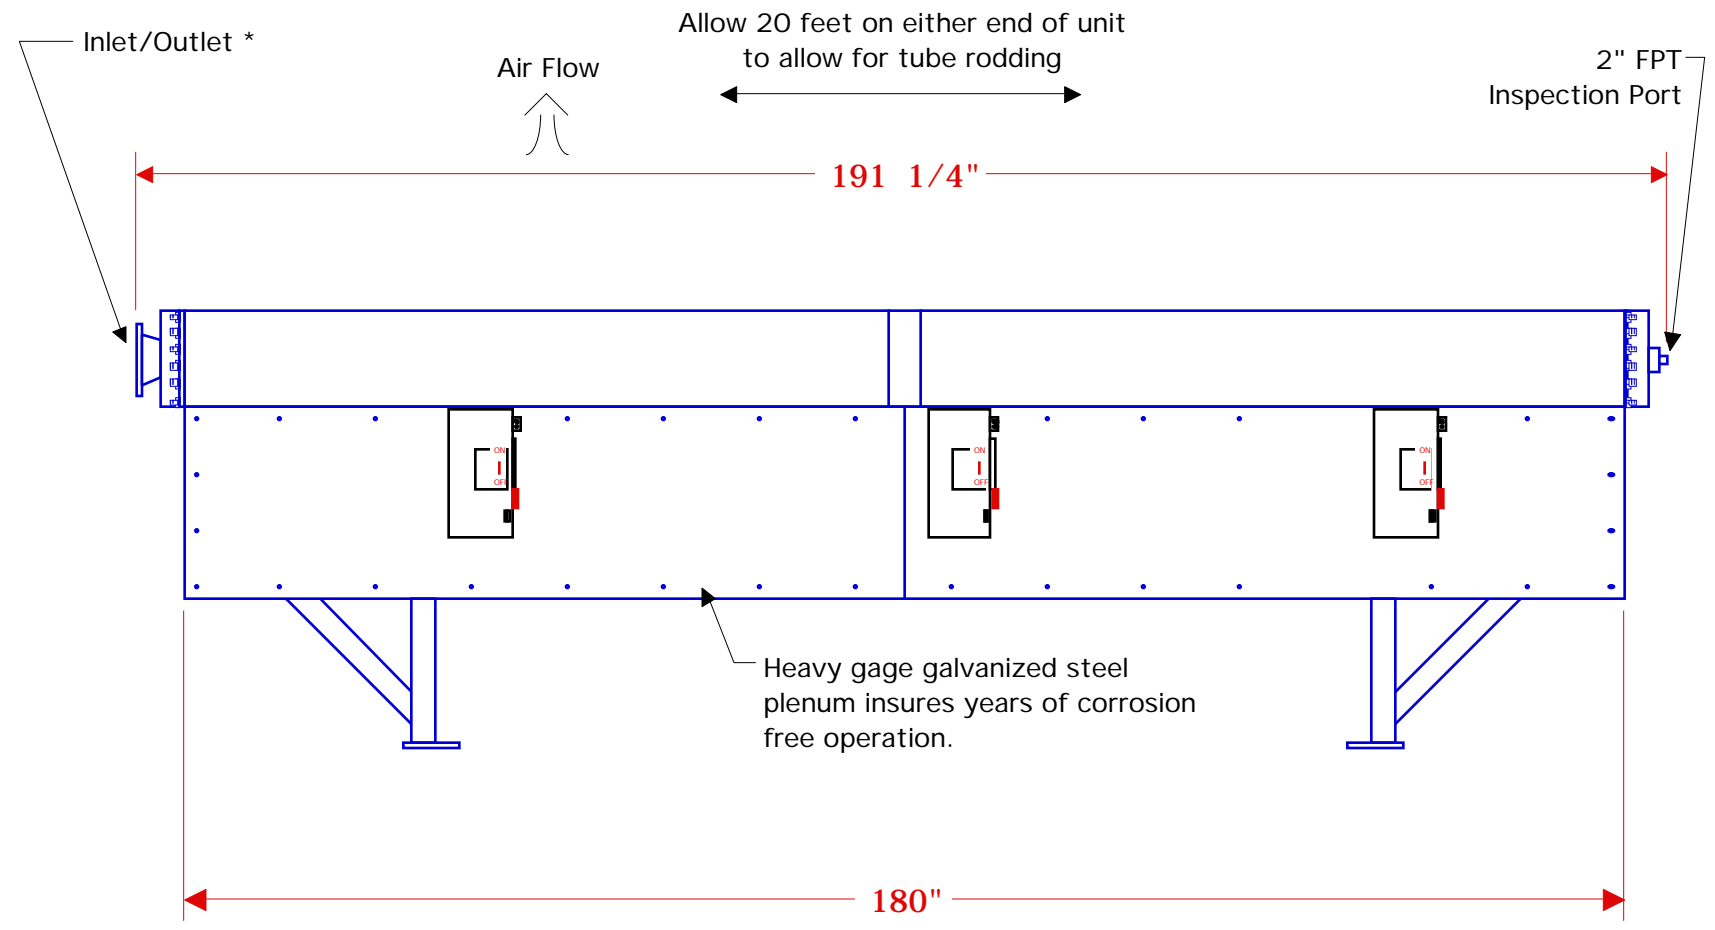

Both ends of the unit are removable to allow easy access to heat exchanger tubes.

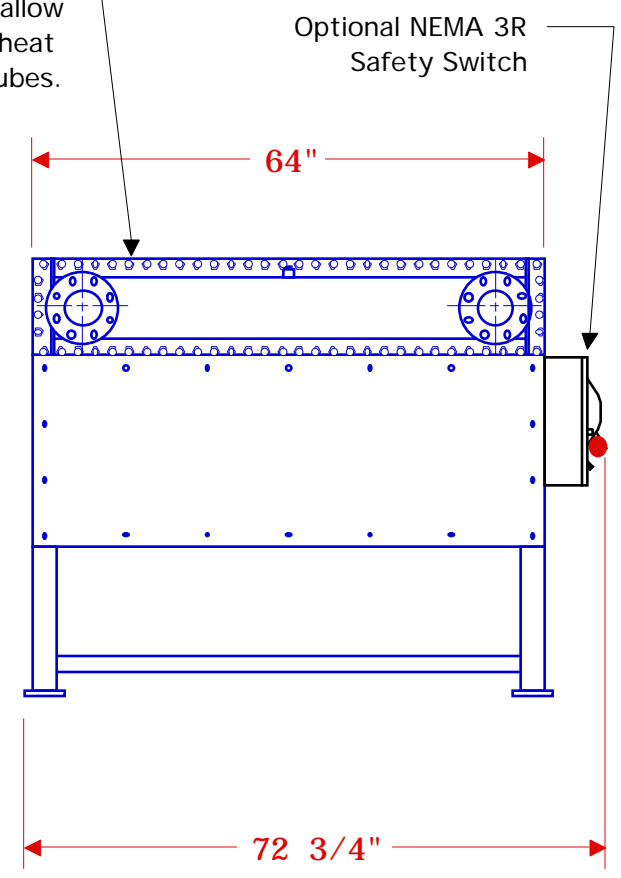

\* NOTE: Either Nozzle may be the inlet or outlet  
All dimensions are approximate and subject to change without notice.

Weight: 4532 lbs

<b>SBS CORPORATION</b> 81 MILL STREET • ROCHESTER, MI 48307 • USA U.S. & Canada 1-800-662-8776 • Fax 1-248-652-4303 • www.sbscorporation.com		
CUSTOMER:		
DRAWN BY: GSB	DATE: 8/9/02	SCALE: 1 : 24
Quench Air Model 5154		